


EVERCOAT®

EVERCOAT®

POLYESTER PRIMER SURFACERS

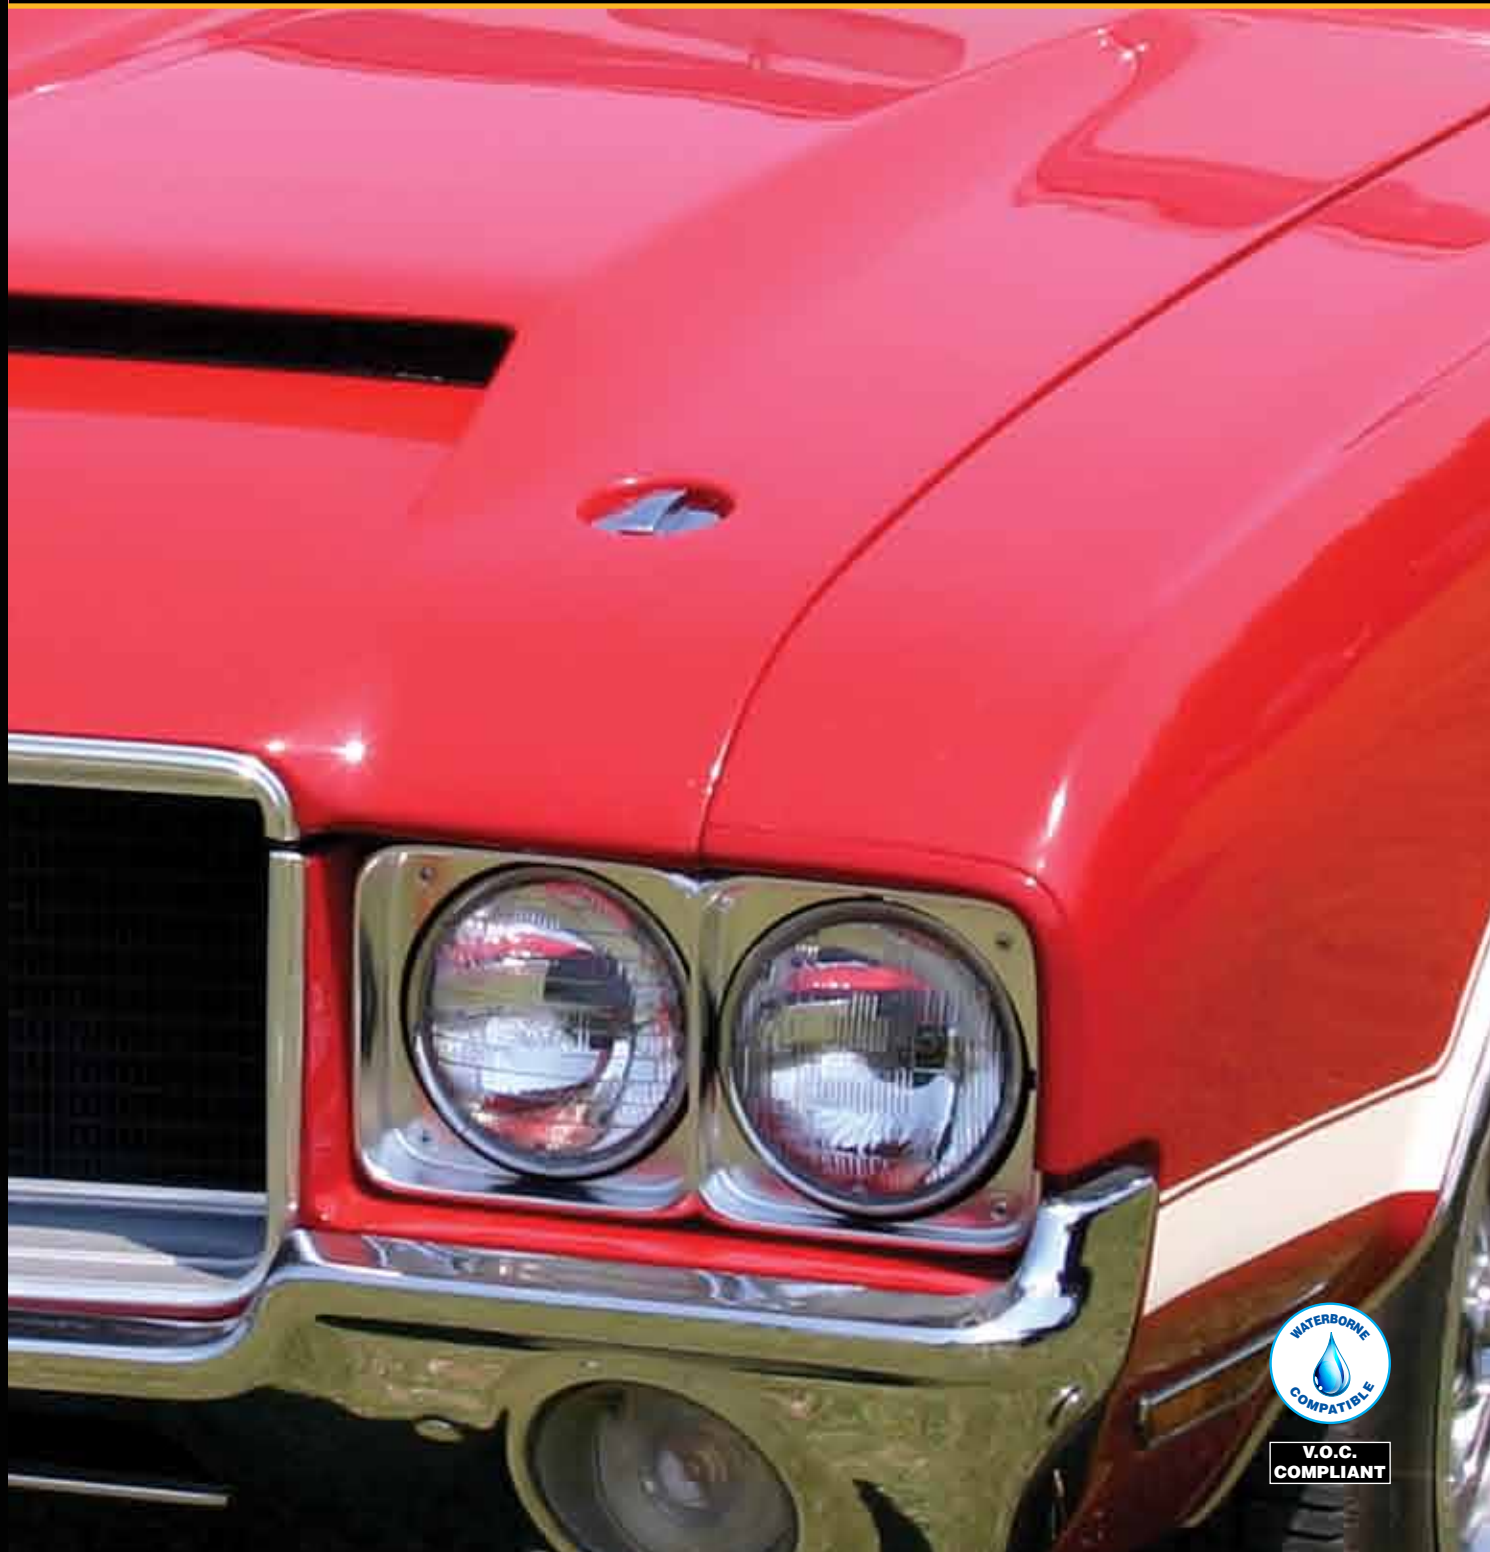

V.O.C. COMPLIANT

EVERCOAT®

No matter the repair challenge...EVERCOAT® offers the right product!

# EVERCOAT® 4:1 POLYESTER PRIMERS

## **NEW** SUPER BUILD 4:1 ULTRA HIGH BUILD POLYESTER PRIMER SURFACER

**TWICE THE FILM BUILD OF OTHER POLYESTER PRIMERS!**

- Direct to Metal application eliminates the need for epoxy or self-etch primers
- Easy, accurate mixing without a scale
- Sprays with less overspray than traditional polyester primers



## FEATHER FILL® 4:1

- High solids, high build primer that dries with little to no surface texture!*
  - Reduces sanding time, increases productivity
- Fast Dry-to-Sand time and extended pot life improves cycle time!*
  - 70 minute pot life means less mixing, more spraying
  - 60-90 minute Dry-to-Sand time is at least 25% faster than other traditional polyester primers

- First polyester primer surfacer with an easy to use 4:1 mix ratio!*

- Eliminates over or under catalyzed primer
- Easy, accurate mixing without a scale

- Sprays with less overspray than traditional polyester primers!*

- Saves time and money by requiring less masking



Part No.	Description	Color	Size	Units/Case
100733	4:1 Polyester Primer Catalyst*	Clear	Quart	6
100730	Super Build 4:1	Gray	Gallon	2

Pot Life	60 mins
Air Dry	90-150 mins
Force Dry	30 mins @ 140°F / 60°C
Dry Mills/Coat	6-8 mils



V.O.C. COMPLIANT

(\*CATALYST SOLD SEPARATELY)

Part No.	Description	Color	Size	Units/Case
100733	4:1 Polyester Primer Catalyst*	Clear	Quart	6
100732	Feather Fill 4:1 Primer	Gray	Gallon	2

Pot Life	70 mins
Air Dry	60-90 mins
Force Dry	30 mins @ 140°F / 60°C
Dry Mills/Coat	2-3 mils



V.O.C. COMPLIANT

(\*CATALYST SOLD SEPARATELY)





### FEATHER FILL® G2™ ADVANCED POLYESTER PRIMER SURFACER

- High Build Formula with minimal texture on surface.
- Excellent adhesion to fiberglass, SMC and wood.
- Fast Dry-to-Sand time reduces cycle time.
- Waterborne compatible and VOC compliant.
- MEKP Activator included.

Part No.	Color	Size	Units/Case	Pot Life	
100710	Buff	Quart	6		35 mins
100711	Buff	Gallon	4	<b>Air Dry</b>	90-120 mins
100712	Gray	Quart	6	<b>Force Dry</b>	30 mins @ 140°F / 60°C
100713	Gray	Gallon	4		
100714	Black	Quart	6		
100715	Black	Gallon	4	<b>Dry Mils/Coat</b>	2-3 mils



### SLICK SAND™ POLYESTER PRIMER SURFACER

- Extra High Build Formula that is ideal for leveling large uneven surfaces.
- Excellent adhesion to fiberglass, SMC and wood.
- Waterborne compatible and VOC compliant.
- MEKP Activator included.

Part No.	Color	Size	Units/Case	Pot Life	
100708	Gray	Quart	6		45 mins
100709	Gray	Gallon	4	<b>Air Dry</b>	120-135 mins
				<b>Force Dry</b>	30 mins @ 140°F / 60°C
				<b>Dry Mils/Coat</b>	3-4 mils



### FEATHER FILL® POLYESTER PRIMER SURFACER

- High Build Formula that is ideal for filling scratches and minor imperfections without shrinking.
- Can be used on fiberglass and wood surfaces.
- Waterborne compatible and VOC compliant.
- MEKP Activator included.

Part No.	Color	Size	Units/Case	Pot Life	
100401	Gray	Quart	6		45 mins
100391	Gray	Gallon	4	<b>Air Dry</b>	90-120 mins
				<b>Force Dry</b>	30 mins @ 140°F / 60°C
				<b>Dry Mils/Coat</b>	2-3 mils

